


## Kerbing

- 125mm x 255mm half batter precast concrete kerb to BSEN1340 Type HB2 on 13mm thick mortar bed or laid and bedded on ST2 concrete foundation whilst plastic.100mm upstand.
- Over break in the existing carriageway due to the excavation shall be made good.

## **Buildout Surfacing**

- 20mm of AC6 med surf 100/150 Surface Course to BSEN13108-1.
- 45mm of AC20 open bin 160/220 Binder Course to BSEN13108-1.
- Varies Binder Course regulating material.
- Tack coat existing cleaned carriageway surface

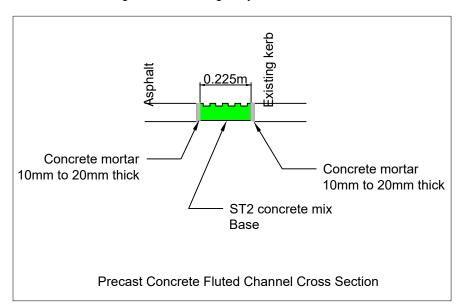

Drawing No. Revision 0

Site 1

Name Holloway Road

Pole Ex-O

Flag Metropole 680mm
NaPTAN Code oxfapdgj (69327345)
OS grid 435259 209619

Bearing East

Site 2

Name Holloway Road

Pole Ex-O

 Flag
 Metropole 780mm

 NaPTAN Code
 oxfapdgm (69327346)

 OS grid
 435311 209581

Bearing West

© Crown Copyright and Database rights 10023343 2017

Rev.	Date	Purpose of revision	Drawn	Checked	Approved



Director for Infrastructure Delivery Communities Oxfordshire County Council County Hall New Road Oxford OX1 1ND

Project title

Witney - Corn Street

Drawing title

Proposed Bus Stop Improvements

Scale @ A3	Drawn by	Checked by	Approved by
n.t.s			
11.1.3	Date drawn	Date checked	Date approved
			''

No. Revision