

Site 1 Name King Georges Field  
 NaPTAN Code oxfgtpt (69347878)  
 OS grid 436343 210052  
 Bearing Northwest

© Crown Copyright and Database rights 10023343 2017

Rev.	Date	Purpose of revision	Drawn	Checked	Approved


Owen Jenkins  
 Director for Infrastructure Delivery  
 Communities  
 Oxfordshire County Council  
 County Hall  
 New Road  
 Oxford  
 OX1 1ND  
 Tel: 0845 310 1111

Project title  
 Witney - Newland Road

Drawing title  
 Proposed Bus Stop Improvements

Drawing Status		Information	
Scale @ A3 n.t.s	Drawn by	Checked by	Approved by
	Date drawn	Date checked	Date approved

Oxfordshire Project No. & File Ref

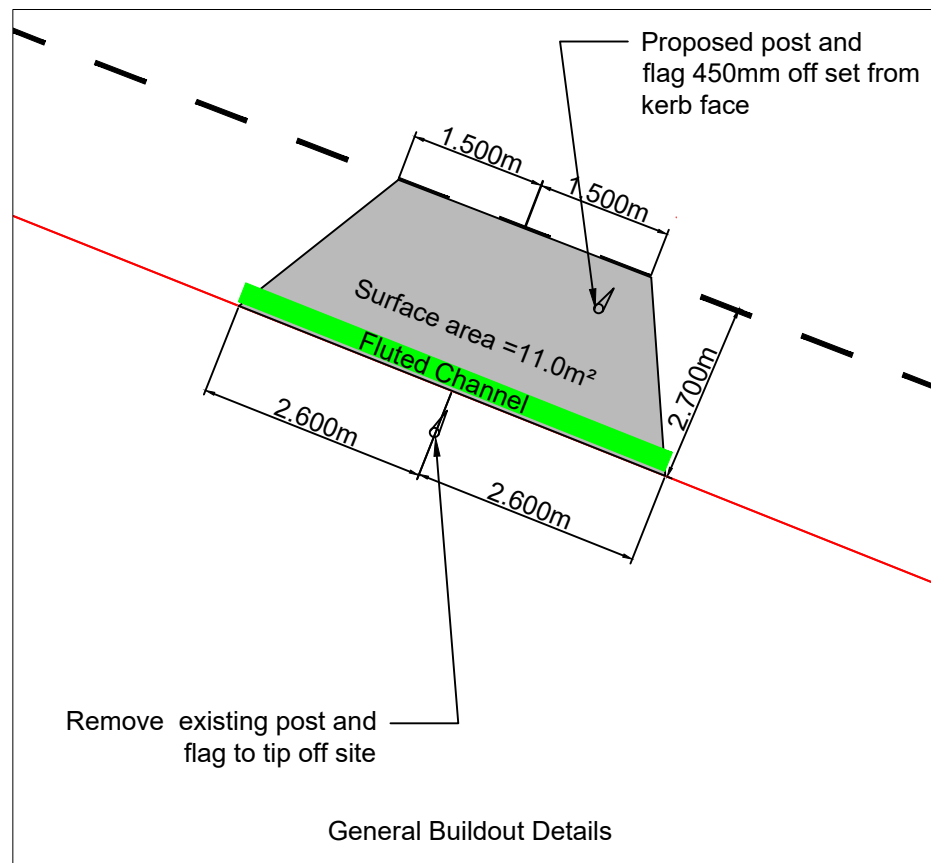

**Kerbing**

- 125mm x 255mm half batter precast concrete kerb to BSEN1340 Type HB2 on 13mm thick mortar bed or laid and bedded on ST2 concrete foundation whilst plastic. 100mm upstand.
- Over break in the existing carriageway due to the excavation shall be made good.

**Buildout Surfacing**

- 20mm of AC6 med surf 100/150 Surface Course to BSEN13108-1.
- 45mm of AC20 open bin 160/220 Binder Course to BSEN13108-1.
- Varies Binder Course regulating material.
- Tack coat existing cleaned carriageway surface

